




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04Q</b>		A2	(11) International Publication Number: <b>WO 99/66736</b>
			(43) International Publication Date: 23 December 1999 (23.12.99)
(21) International Application Number: <b>PCT/FI99/00520</b> (22) International Filing Date: 15 June 1999 (15.06.99) (30) Priority Data: 981401 16 June 1998 (16.06.98) FI (71) Applicant (for all designated States except US): <b>NOKIA MOBILE PHONES LTD. [FI/FI]; Patent Dept., P.O. Box 86, FIN-24101 Salo (FI).</b> (72) Inventors; and (75) Inventors/Applicants (for US only): <b>TURUNEN, Matti [FI/FI]; Kirkkoladonkatu 28 B 27, FIN-33560 Tampere (FI). KALLIOKULJU, Juha [FI/FI]; Jokioistentie 5, FIN-37470 Vesilahti (FI).</b> (74) Agent: <b>BERGGREN OY AB; P.O. Box 16, FIN-00101 Helsinki (FI).</b>		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> Without international search report and to be republished upon receipt of that report.	

(54) Title: **METHOD AND SYSTEM FOR BEARER MANAGEMENT IN A THIRD GENERATION MOBILE TELECOMMUNICATIONS SYSTEM**

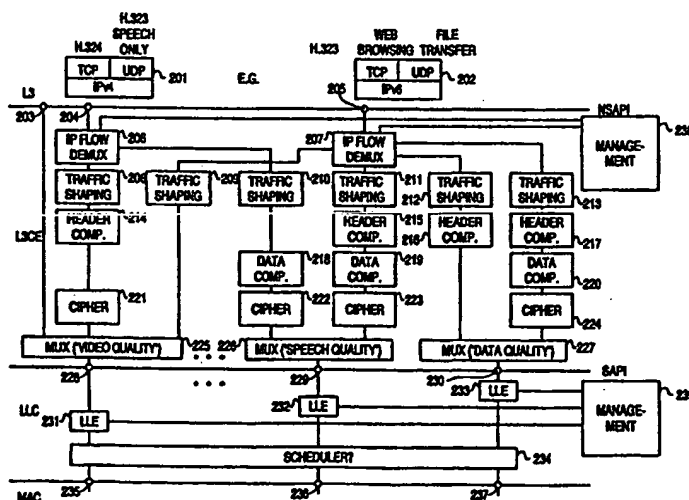

## (57) Abstract

In a telecommunication device the handling of data to be transmitted proceeds according to a protocol stack having a L3 layer and a MAC layer. For handling data flows between the L3 layer and the MAC layer the following steps are performed: a flow of data to be transmitted coming from the L3 layer is demultiplexed (206, 207, 403, 404) into a number of component data flows, each component data flow having a certain Quality of Service requirement; the component data flows are arranged into groups where the Quality of Service requirement of each component data flow in a group is similar to the Quality of Service requirements of the other component data flows belonging to the same group; the component data flows are multiplexed (225, 226, 227, 409) groupwise into multiplexed data flows; and the multiplexed data flows are outputted to the MAC layer.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## Method and System for Bearer Management in a Third Generation Mobile Telecommunications System

5 The invention applies generally to the management of bearer services in a third generation mobile telecommunications system. Especially the invention applies to the establishment and upkeep of bearers for services that have different quality of service requirements between a mobile station and the fixed parts of the mobile telecommunications system.

10

The denomination "mobile telecommunications system" refers generally to any telecommunications system which enables a wireless communication connection between a mobile station (MS) and the fixed parts of the system when the user of the mobile station is moving within the service area of the system. A typical mobile  
15 communications system is a Public Land Mobile Network (PLMN). The majority of mobile telecommunications systems in use at the time of filing this patent application belong to the second generation of such systems, a well-known example being the GSM system (Global System for Mobile telecommunications). The invention applies mostly to the next or third generation of mobile telecommunications systems. A  
20 system known as the UMTS (Universal Mobile Telecommunications System), which currently undergoes standardisation, is used as an example.

In third generation systems the concepts of a bearer and a service are introduced. A bearer generally corresponds to the older concept of a traffic channel, defining for  
25 example the user data rate and Quality of Service (QoS) that will be provided by the system for transferring information between a mobile station and some other part of the system. For example a bearer between the mobile station and a base station is a radio bearer and a bearer between a radio network controller and a core network is an Iu bearer (the interface between a radio network controller and a core network is  
30 called the Iu interface). A service is something that necessitates information transfer between a mobile station and the fixed parts of the system, like a phone call or the transfer of a text message. A major task for the operation of a third generation mobile telecommunications system is to manage (set up, keep up and tear down as necessary) the bearers so that each requested service can be provided to the mobile  
35 stations without wasting the available bandwidth.

Some of the problems of bearer management will be illustrated in the following by referring to packet-switched data transmission functions, where one of the most

Correspondingly block 103 represents the known lower layer (BSSGP; Base Station Subsystem GPRS Part) functions that are needed below the LLC layer 101 in a SGSN. The interface between the LLC layer 101 and the RLC/MAC layers is called the RR interface and the interface between the LLC layer 101 and the BSSGP layers is called the BSSGP interface.

Above the LLC layer there are the known GPRS Mobility Management functions 104, Subnetwork Dependent Convergence Protocol (SNDCP) functions 105 and Short Messages Services functions 106 that belong to Layer 3 in the layered protocol structure that is employed. Each one of these blocks has one or more interfaces with the LLC layer 101, connecting to its different parts. The Logical Link Management Entity 107 has an LLGMM control interface (Logical Link - GPRS Mobility Management) with block 104. Mobility management data is routed through a LLGMM data interface between block 104 and the first Logical Link Entity 108 of the LLC layer. The second 109, third 110, fourth 111 and fifth 112 Logical Link Entities connect to block 105 through the corresponding interfaces; according to the QoS levels handled by each of the Logical Link Entities the interfaces are known as QoS 1, QoS 2, QoS 3 and QoS 4. The sixth Logical Link Entity 113 of the LLC layer connects to block 106 via an LLSMS interface (Logical Link - Short Messages Services). The Service Access Point Identifiers or SAPIs of the first 108, second 109, third 110, fourth 111, fifth 112 and sixth 113 Logical Link Entities are respectively 1, 3, 5, 9, 11 and 7. Each one of them is connected inside the LLC layer to a multiplexing block 114, which handles the connections through the RR interface to block 102 in a mobile station or the connections through the BSSGP interface to block 103 in an SGSN.

The connection between the multiplexing block 114 and the lower layer block 102 in the MS may be described as a "transmission pipe". Because all data flows between the upper parts of the LLC layer and the lower layers 102 go through the same multiplexing procedure 114 and the same transmission pipe, the maximum bit rate and mean bit rate parameters of the available QoS profile relate to this transmission pipe. However, the GPRS standard does not define this relation clearly. The QoS profile is negotiated during the PDP activation procedure referred to above, and it can not be changed after initial assignment. For example it is not possible to change the maximum bit rate and/or the mean bit rate according to the momentary needs of the user otherwise than below a certain maximum negotiated at the activation of the PDP context. Although this problem has been described in context of GPRS services, it applies generally to all such mobile

telecommunications systems where different services will require different QoS profiles but their relation to the information exchange between the Logical Link Control layer and the lower layers have been poorly and/or inflexibly defined.

- 5 It is thus an object of this invention to provide a method and a system for managing the bearers in a mobile telecommunications system so that the changing data transmission needs of a user during a connection may be accounted for.

10 The objects of the invention are fulfilled by having several parallel transmission pipes, corresponding to different QoS profiles, within the layered protocol structure and forwarding the QoS needs of the services and/or applications to a Call Management entity which then increases or decreases the capacity of each transmission pipe according to need.

15 It is characteristic to a method according to the present invention that it comprises the steps of

- a) demultiplexing a flow of data to be transmitted coming from the L3 layer into a number of component data flows, each component data flow having a certain Quality of Service requirement,
- 20 b) arranging the component data flows into groups where the Quality of Service requirement of each component data flow in a group is similar to the Quality of Service requirements of the other component data flows belonging to the same group,
- c) multiplexing the component data flows groupwise into multiplexed data flows
- 25 and
- d) outputting the multiplexed data flows to the MAC layer..

The invention also applies to a telecommunication device having the characteristic means for

- 30 - demultiplexing a flow of data to be transmitted coming from the L3 layer of a protocol stack into a number of component data flows, each component data flow having a certain Quality of Service requirement,
- arranging the component data flows into groups where the Quality of Service requirement of each component data flow in a group is similar to the Quality of
- 35 Service requirements of the other component data flows belonging to the same group,
- multiplexing the component data flows groupwise into multiplexed data flows and
- outputting the multiplexed data flows to the MAC layer of said protocol stack.

According to the invention the protocol layers including the known Layer 3 and the known MAC layer are structured so that

- an incoming data flow from Layer 3 is demultiplexed into its potential component data flows which may have mutually different QoS requirements,
- the resulting component data flows are processed and
- the processed component data flows originating from different incoming data flows but having similar QoS requirements are multiplexed together before directing them further to the MAC layer.

The QoS requirements that can be taken into account are mainly related to the expected delay and the used coding. The invention does not restrict the choice of network element to which the invention is applied, but it should be noted that not all network elements include all protocol layers. A certain protocol layer in a certain mobile station or a fixed part of the network has in most cases a peer entity in some other device it is communicating with. According to a preferred embodiment of the invention the multiplexed bitstream of data flows having similar QoS requirements will be conveyed through the whole mobile telecommunications system and demultiplexed again only at the PDAN (Packet Data Access Node) or the WMSC (Wireless / Mobile Switching Centre) from which the component data flows continue in a network where their specific QoS requirements are independently accounted for.

The novel features which are considered as characteristic of the invention are set forth in particular in the appended claims. The invention itself, however, both as to its construction and its method of operation, together with additional objects and advantages thereof, will be best understood from the following description of specific embodiments when read in connection with the accompanying drawings.

Fig. 1 illustrates a known LLC protocol layer,

Fig. 2 illustrates protocol layers according to an embodiment of the invention,

Fig. 3 illustrates a system according to an embodiment of the invention,

Fig. 4 illustrates parts of Fig. 2 as an example and

Fig. 5 illustrates an aspect of a method according to the invention.

Fig. 2 illustrates the novel and inventive protocol layers that should replace the previously known LLC layer of Fig. 1 in a certain embodiment of the present invention. At the top of Fig. 2 there are shown two blocks 201 and 202 that represent data flows coming from an upper protocol layer, i.e. Layer 3 (also known as L3 for short). In Fig. 2 the data flows are shown to be arranged according to IPv4 (Internet Protocol version 4; block 201) and IPv6 (Internet Protocol version 6; block 202), but the invention is not restrictive in relation to which protocol has been used to compose the upper layer data flows; also a merely unspecified data flow is shown on the far left. The NSAPs or Network Service Access Points 203, 204 and 205 through which the upper layer data flows enter the L3CE layer (Layer 3 Compatibility Entity) are identified by NSAPIs or Network Service Access Point Identifiers. The invention does not limit the number of NSAPs that can be used at the top of the L3CE layer.

Inside the L3CE layer those upper data flows that may contain component data flows with different QoS requirements are resolved into the appropriate component data flows in demultiplexers 206 and 207. In Fig. 2 it has been expected that the IPv4 data flow originating from block 201 contains two component data flows and the IPv6 data flow originating from block 202 contains four component data flows. Additionally it has been expected that the first component data flow of the IPv4 data flow has similar QoS requirements as the first component data flow of the IPv6 data flow and the unspecified data flow coming through NSAP 203; the second component data flow of the IPv4 data flow has similar QoS requirements as the second component data flow of the IPv6 data flow; and the third and fourth component data flow of the IPv6 data flow have mutually similar QoS requirements.

Each demultiplexed component data flow is conveyed from demultiplexer 206 or 207 to its own traffic shaping block 208, 209, 210, 211, 212 or 213 for traffic shaping known as such. Other processing options that are available for processing the component data flows are for example header compression, data compression and ciphering. The invention does not limit the number, order or nature of processing options applied to any component data flow; the exemplary combinations shown in Fig. 2 are header compression 214 + ciphering 221, data compression 218 + ciphering 222, header compression 215 + data compression 219 + ciphering 223 (or 217 + 220 + 224) header compression only 216 or no processing at all.

station 301 and both in the WMSC 304 and the packet data access node 305, and the Bearer Management (BM) and the Radio resource Management (RM) functions are implemented in the mobile station 301 and in the radio network controller 303. In the following description it will be expected that the user of the mobile station 301 has firstly no active connections to any other parts of the network, then he initiates an audio connection to an IP network requiring a bit rate of 30 kbit/s, subsequently he initiates additionally an H.323 audio connection to the IP network requiring an additional bit rate of 10 kbit/s and finally he terminates the first audio connection leaving only the H.323 audio connection active.

An audio connection and an H.323 audio connection are both real-time services requiring a very short delay but tolerating a moderate bit error ratio, so they may both be classified as requiring "audio quality".

At the moment when the user expresses his wish to activate an audio connection of 30 kbit/s, a notification is sent to the Call Management block in the mobile station which checks through the Bearer Management block, what kind of connections the user has already active. Above it was expected that the user did not have any active connections before the audio connection so the Call Management block will ask the Bearer Management block to set up the necessary bearers together with its peer entity in the radio network controller. A radio bearer will be needed between the mobile station and the base station subsystem: this belongs to the responsibility of the Radio resource Management level so the Bearer Management block will ask it to set up a radio bearer of 30 kbit/s. A bearer of 30 kbit/s for audio traffic must also be set up over the Iu interface between the radio network controller and the core network it connects to: this the Bearer Management block of the radio network controller takes care of after contacted by the Bearer Management block of the mobile station. After the Bearer Management level has accomplished the task of setting up the bearers, it will inform the Call Management level, whereby the connection has been established according to the wish expressed by the user.

The following stage in the example is the one where the user requests for an additional H.323 audio connection of 10 kbit/s. A notification is again sent to the Call Management block which checks through the Bearer Management block, what kind of connections the user has already active. The Bearer Management block will notice that the user has already an active connection with similar QoS requirements, so it will ask the Radio resource Management level to increase the "width" of the radio bearer to 40 kbit/s. Simultaneously the Bearer Management block of the radio



network controller increases the "width" of the Iu bearer to 40 kbit/s. Thereafter the Bearer Management level informs the Call Management level that the bearers have been updated to house the new connection.

- 5 At the last stage of the example the user terminates the 30 kbit/s connection but leaves the 10 kbit/s connection active. The Call Management entity will ask the Bearer Management block to release the resources allocated to the 30 kbit/s connection, whereby the Bearer Management level will first ask the Radio resource Management level to narrow down the radio bearer to 10 kbit/s. The Bearer  
10 Management block of the radio network controller will also narrow down the Iu bearer to 10 kbit/s.

In Fig. 4 the audio connection has its audio information source within block 401 and the H.323 audio connection originates in block 402; actually the source of the  
15 information may be somewhere else but the simplified block representation is useful for understanding the invention. Both data flows have their own demultiplexers 403 and 404 respectively. In this case the data flows coming from the L3 layer consist of only one component stream each, meaning that the demultiplexing operation in demultiplexers 403 and 404 is merely the same as directing the data flow into the  
20 correct traffic shaping block 405 or 406. The data flow relating to the H.323 audio connection undergoes header compression in block 407 and ciphering in block 408, and the data flows are multiplexed in a common multiplexer 409 because both have similar QoS requirements. Taken that the setting up and tearing down of the connections follow the above-given order, it should be noted that first (after the  
25 initial audio connection activation) there is only one input to multiplexer 409, namely the component data flow coming from demultiplexer 403 through traffic shaper 405. Thereafter there are both of the two inputs to multiplexer 409 for a while, until after the termination of the audio connection only the component data flow relating to the H.323 audio connection remains.

30

Fig. 5 is a flow diagram that illustrates the alternatives of operation when bearers relating to certain QoS are handled according to an advantageous embodiment of the invention. At state 501 there is noticed that a change is needed in the amount of data transfer capacity currently allocated to services with a certain QoS determination.  
35 Stage 502 is a decision step where it is determined whether the change means an addition of allocated capacity (positive decision at stage 502) or the cancellation of a part of the previous allocations (negative decision at stage 502). Comparing with the example discussed above, both the moment when the user expresses his wish to

activate an audio connection of 30 kbit/s and the one where the user requests for an additional H.323 audio connection of 10 kbit/s cause a transition from stage 501 to stage 502 and further to stage 503, where the Call Management functionality checks through the Bearer Management functionality the potential availability of previous bearers with the same QoS. If there are no such bearers available, a new bearer is set up according to stage 504; this is the case of activating the audio connection of 30 kbit/s above. If at stage 503 it is found out that a previous bearer with the same QoS already exists, the "width" or data transfer capacity of the bearer is increased at stage 505. This is the case when the H.323 audio connection of 10 kbit/s is additionally set up in the previous example.

A negative decision at stage 502 means that capacity allocations should be cancelled rather than added, corresponding to the moment in the previous example when the user terminates the 30 kbit/s connection but leaves the 10 kbit/s connection active. At stage 506 a decision is made either to cancel a part of the previous allocations (stage 507) or to tear down a whole bearer (stage 508) if the required decrease in capacity means that a certain bearer with a certain QoS is not needed at all any more. From each of the stages 504, 505, 507 and 509 there is a transfer to the end stage 509, after which a new round starting from stage 501 is immediately possible.

The invention has several advantageous features:

- The number of objects and/or processes belonging to certain protocol layers is relatively small. In a mobile station the number of LLE's and RLCP (Radio Link Control Protocol) objects and/or processes is meant, in a radio network controller the number of RLCP objects and/or processes is meant and in a PDAN the number of LLE's is meant. If the multiplexing of data flows having different QoS would be performed on the MAC level, for example, the number of the objects and/or processes would not be limited by anything; it would be directly proportional to the number of simultaneous connections. Having a limited number of objects and/or processes sets more relaxed requirements to the processing capability and memory size of the devices concerned, which is a major advantage at least in the mobile station where these resources are scarce.
- Because the handling of all component data flows requiring similar QoS has been combined, only few LLE objects are needed to handle transmissions where acknowledgement (ARQ) is required. Especially with selective acknowledgement schemes the overhead caused by acknowledgement frames gets smaller.
- If the multiplexing of data flows having different QoS would be performed on the MAC level, a mechanism should be devised to include into each MAC frame

information about to which data flow the MAC frame belongs. Such overhead is not needed in the invention, because the existing NSAPI, DCOMP or PCOMP information in the L3CE frames is sufficient to identify the correct data flow.

- On the network side the invention enables easier handling of the "transmission pipes" at the Iu interface between a radio network controller and a core network. The number of "transmission pipes" relating to one user is smaller which makes for example handovers easier. Additionally the required size of buffers in the radio network controller is smaller than if the multiplexing of data flows having different QoS would be performed on the MAC level.

As discussed above, the processing of information to be transmitted in a telecommunication device takes place in an arrangement of processing capacity in the form of microprocessor(s) and memory in the form of memory circuits. Such arrangements are known as such from the technology of mobile stations and fixed network elements. To convert a known telecommunication device into a telecommunication device according to the invention it is necessary to store into the memory means a set of machine-readable instructions that instruct the microprocessor(s) to perform the operations described above with reference to Figs. 2 to 4. Composing and storing into memory of such instructions involves known technology which, when combined with the teachings of this patent application, is within the capabilities of a person skilled in the art.

**Claims**

1. Method for handling data flows in a telecommunication device, in which method the handling of data to be transmitted proceeds according to a protocol stack having a L3 layer and a MAC layer, **characterised** in that it comprises between the  
5 top of the L3 layer and the bottom of the MAC layer the steps of
  - a) demultiplexing (206, 207, 403, 404) an L3 layer flow of data to be transmitted into a number of component data flows, each component data flow having a certain Quality of Service requirement,
  - b) arranging the component data flows into groups where the Quality of Service  
10 requirement of each component data flow in a group is similar to the Quality of Service requirements of the other component data flows belonging to the same group,
  - c) multiplexing (225, 226, 227, 409) the component data flows groupwise into multiplexed data flows and
  - 15 d) outputting the multiplexed data flows to the MAC layer (MAC).
2. Method according to claim 1, **characterised** in that it comprises between steps  
a) and b) a step of processing (208, 209, 211, 212, 213, 214, 215, 216, 217, 218,  
20 219, 220, 221, 222, 223, 224, 405, 406, 407, 408) the component data flows.
3. Method according to claim 2, **characterised** in that said processing comprises one or more of the following operations: traffic shaping (208, 209, 211, 212, 213, 405, 406), header compression (214, 215, 216, 217, 407), data compression (218, 219, 220), ciphering (221, 222, 223, 224, 408).  
25
4. A method for altering the allocations of data transfer capacity in a telecommunication system where the mutual communication of a terminal device and a network device is arranged into bearers, each bearer being associated with a certain quality of service, **characterized** in that it comprises the steps of  
30 a) deciding (502), whether a certain alteration in the allocation of data transfer capacity (501) means the need for more allocated capacity with a certain quality of service,
  - b1) as a response to a positive decision at step a), deciding (503), whether there already exists a certain first bearer associated with said quality of service  
35 between the terminal device and the network device,
  - c1) as a response to a positive decision at step b1), increasing (505) the capacity of said existing first bearer,

c2) as a response to a negative decision at step b1), setting up (504) a new bearer between the terminal device and the network device,

b2) as a response to a negative decision at step a), deciding (506), whether said alteration in the allocation of data transfer capacity means the complete  
5 termination for a need of a certain existing second bearer,

c3) as a response to a negative decision at step b2), reducing (507) the capacity of said existing second bearer, and

c4) as a response to a positive decision at step b2), tearing down (508) said existing second bearer.


10 5. A telecommunication device for handling information to be transmitted in the form of data flows and processing information to be transmitted according to a predetermined protocol stack comprising an L3 layer and a MAC layer, **characterised** in that comprises means for

15 - demultiplexing (206, 207, 403, 404) a L3 layer flow of data to be transmitted into a number of component data flows, each component data flow having a certain Quality of Service requirement,

- arranging the component data flows into groups where the Quality of Service requirement of each component data flow in a group is similar to the Quality of  
20 Service requirements of the other component data flows belonging to the same group,

- multiplexing (225, 226, 227, 409) the component data flows groupwise into multiplexed data flows and

25 - outputting the multiplexed data flows to the MAC layer (MAC) of said protocol stack.

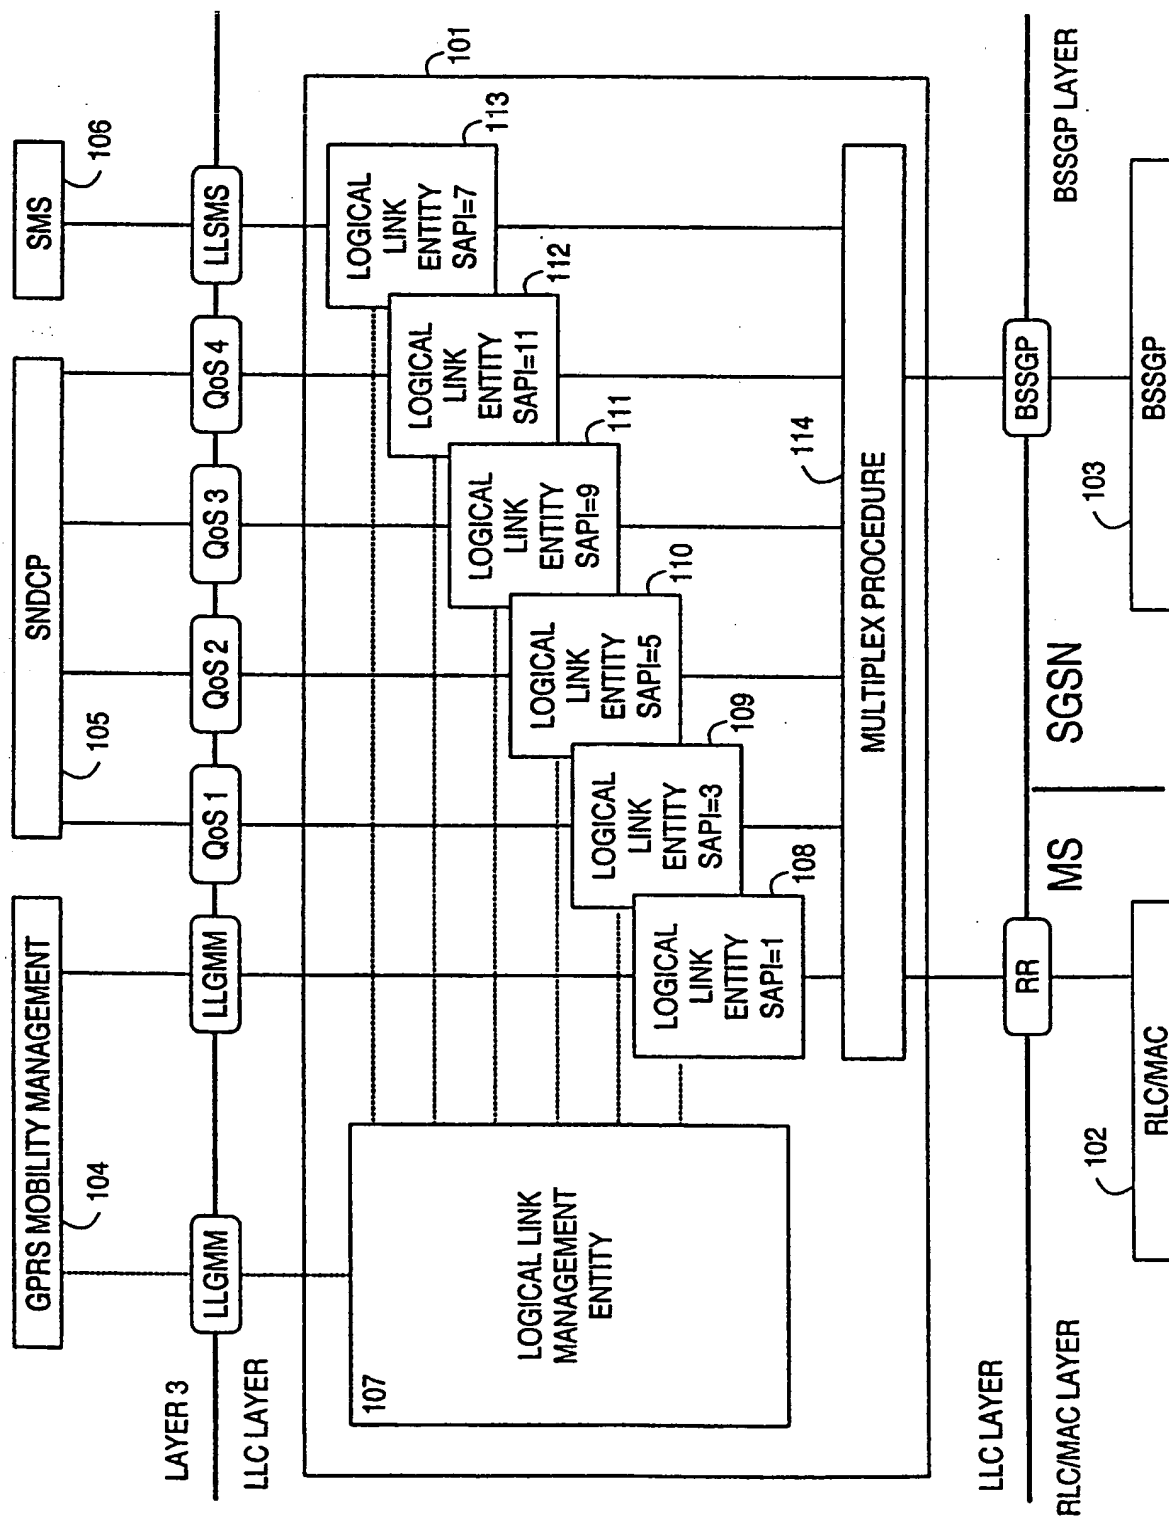

**Fig. 1**  
**PRIOR ART**

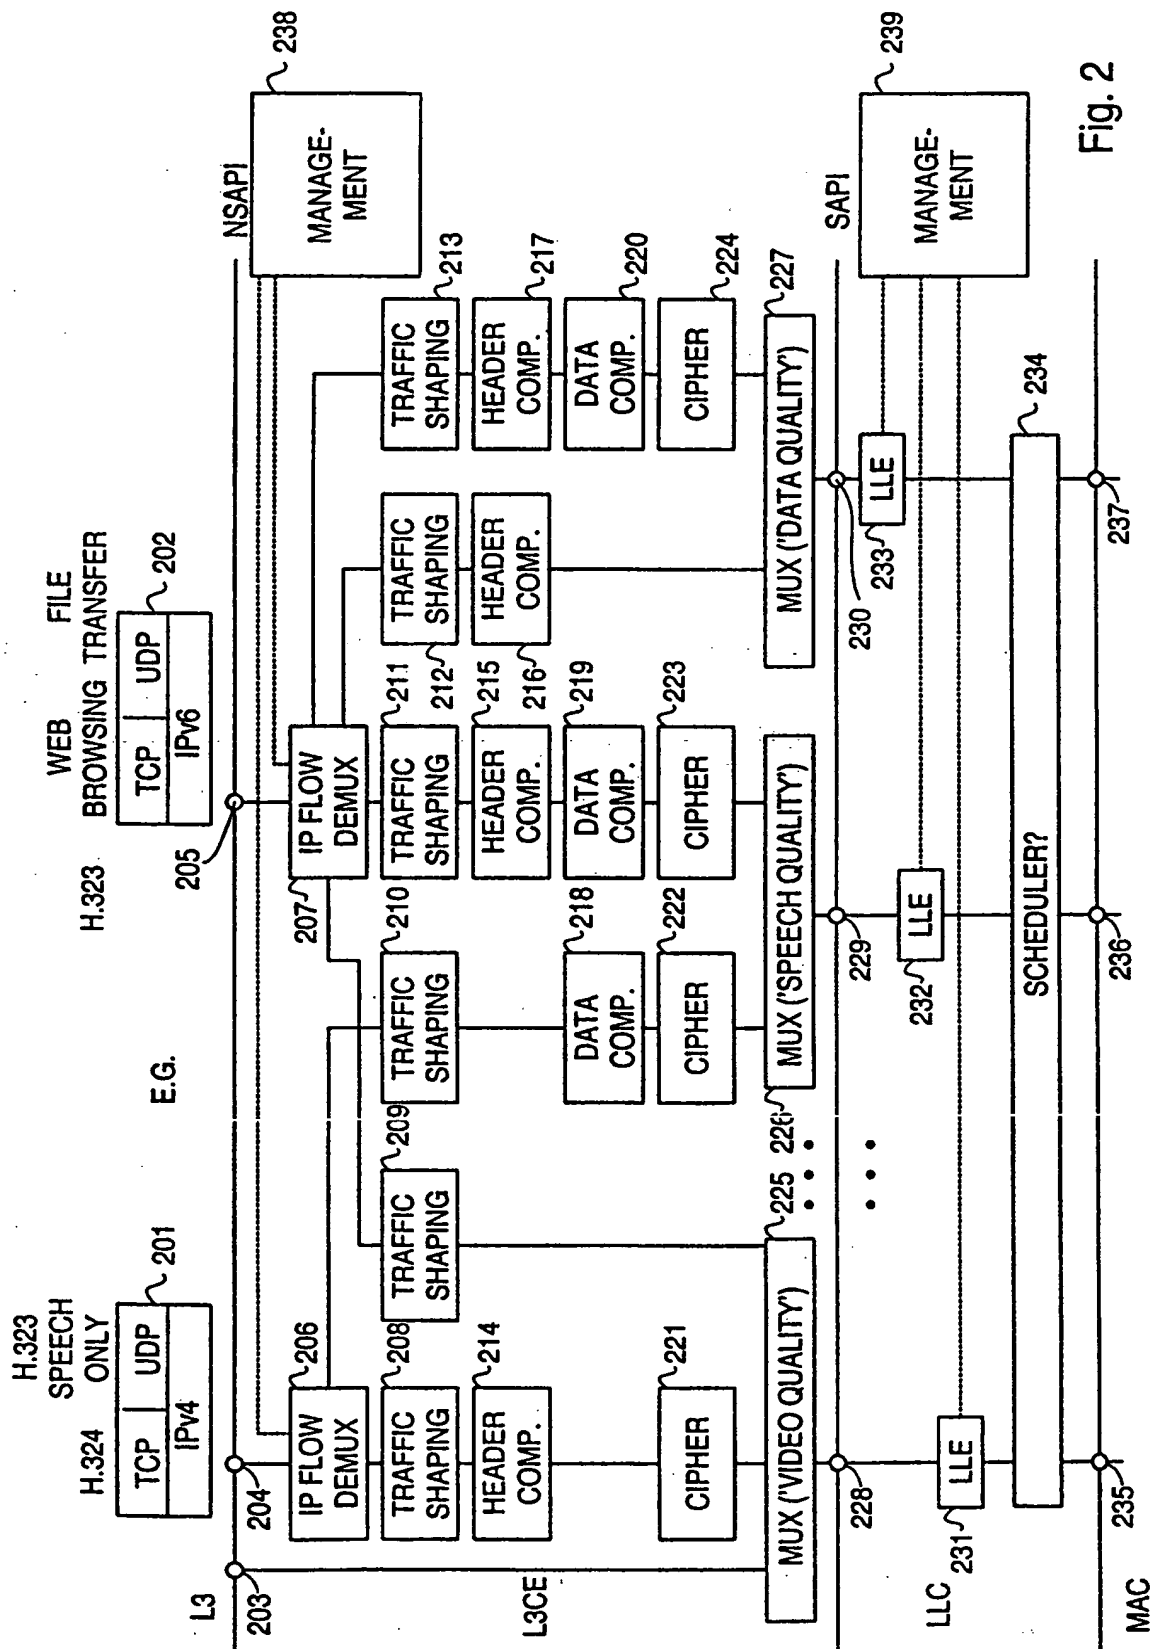


Fig. 2

3/5

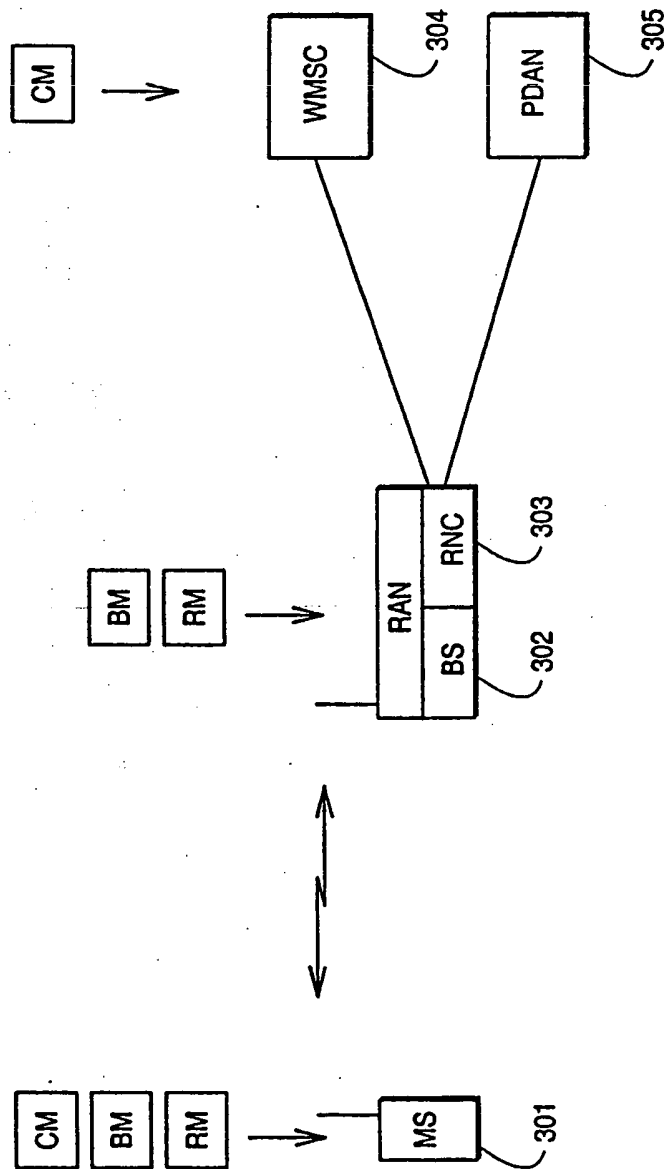


Fig. 3



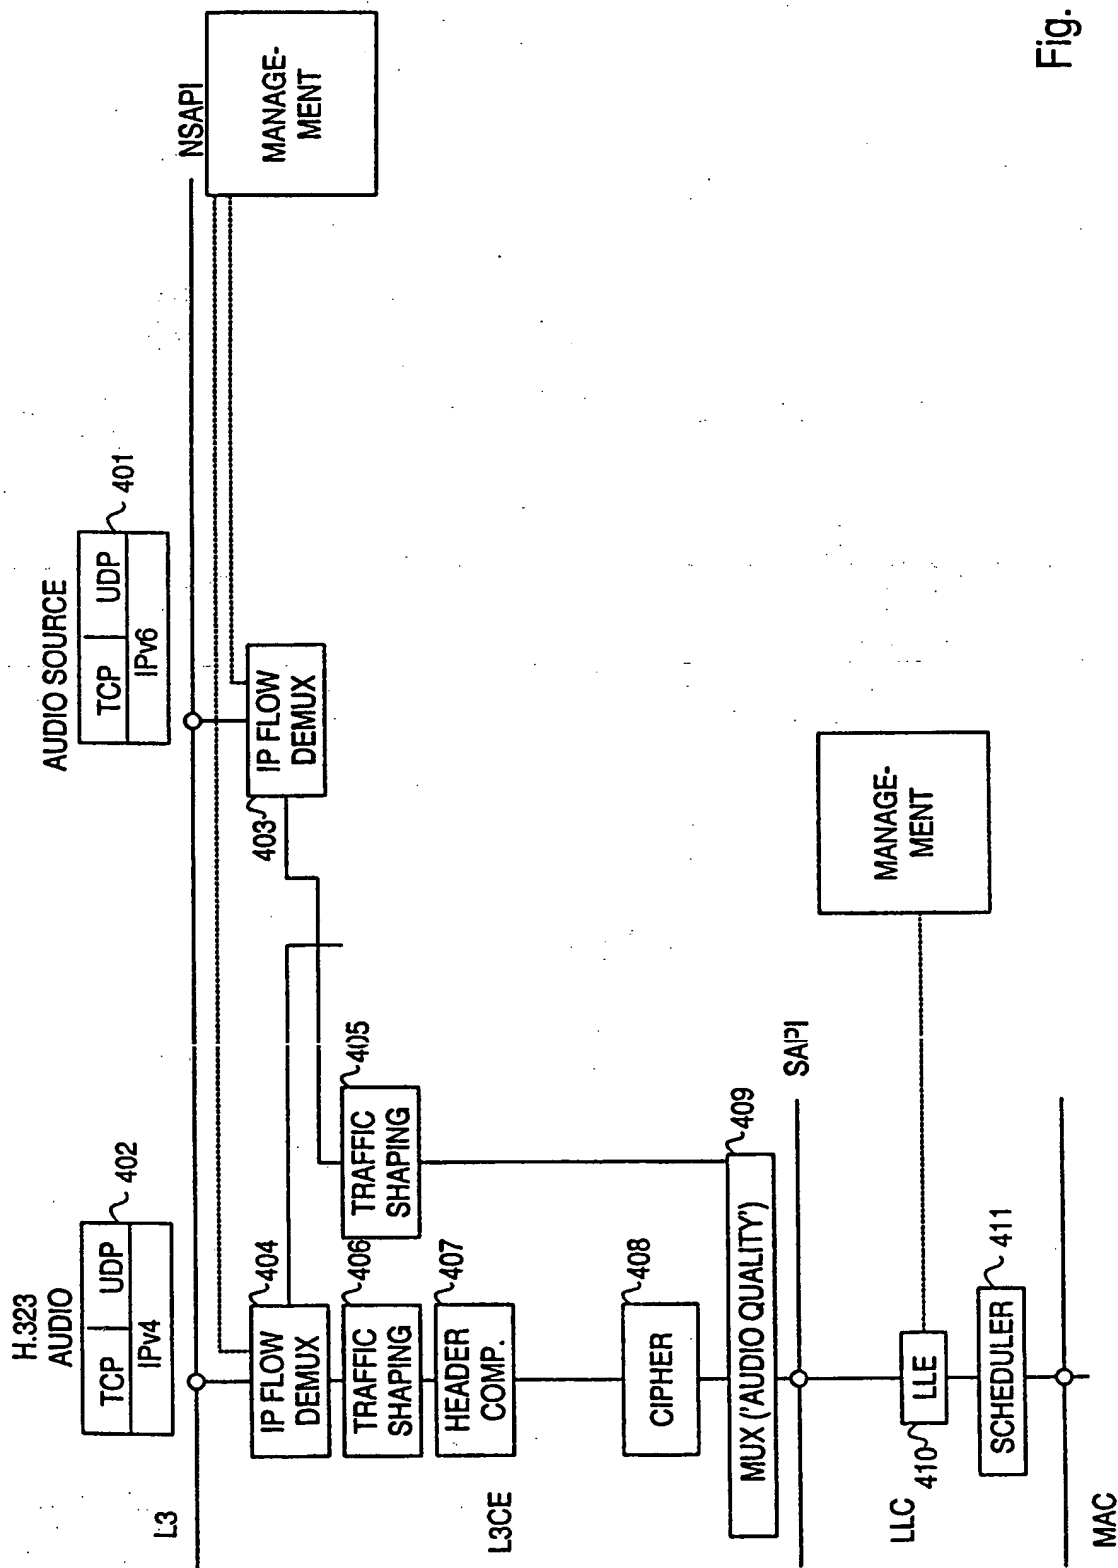


Fig. 4


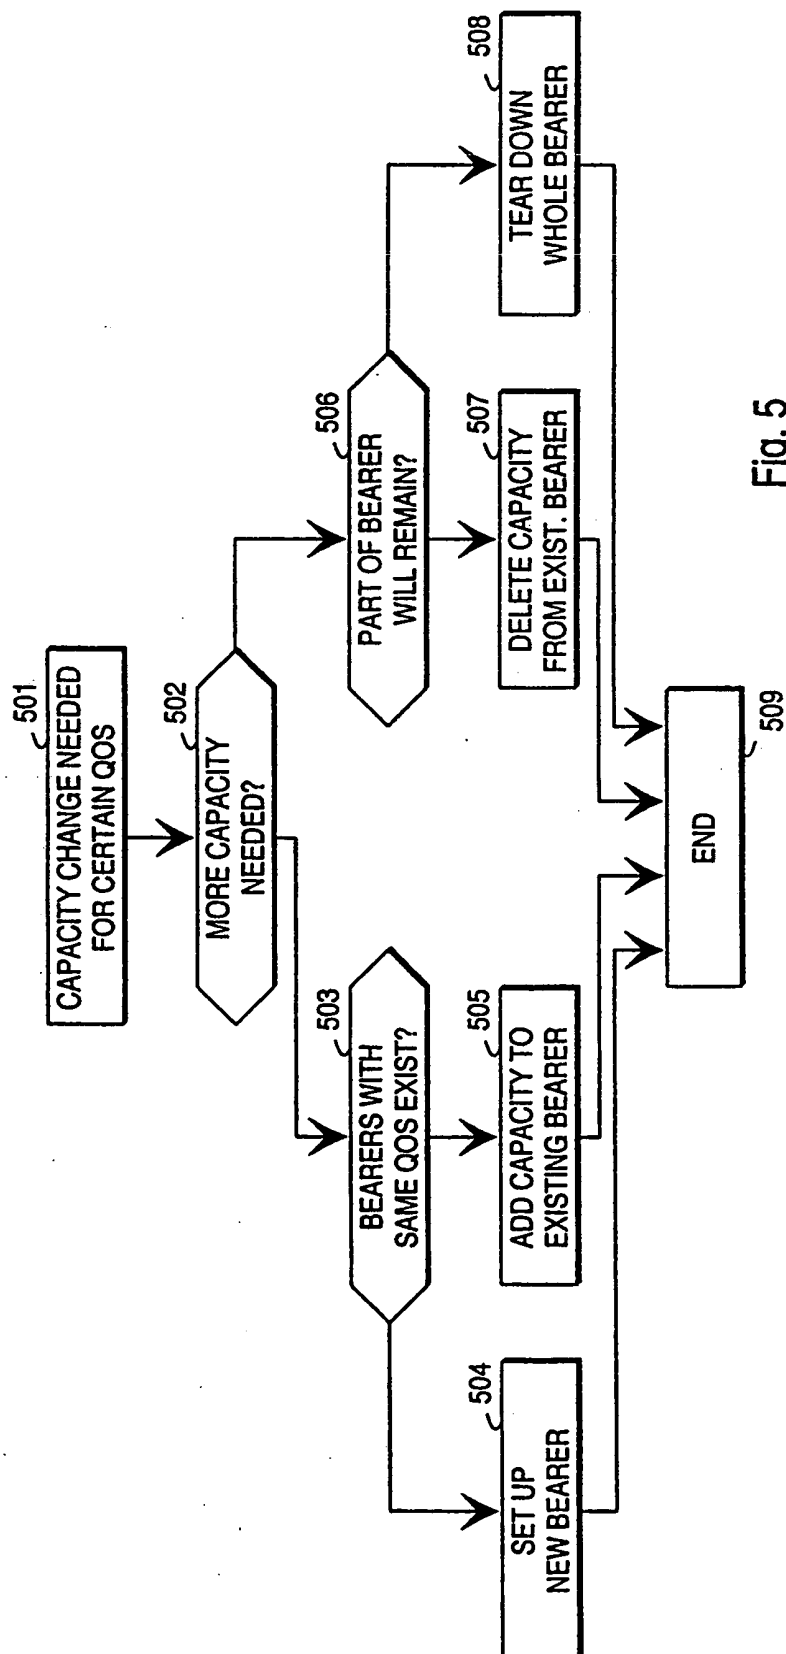


Fig. 5

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : <b>H04L 12/56</b>		A3	(11) International Publication Number: <b>WO 99/66736</b>
			(43) International Publication Date: 23 December 1999 (23.12.99)
(21) International Application Number: PCT/FI99/00520 (22) International Filing Date: 15 June 1999 (15.06.99) (30) Priority Data: 981401 16 June 1998 (16.06.98) FI (71) Applicant (for all designated States except US): NOKIA MOBILE PHONES LTD. [FI/FI]; Patent Dept., P.O. Box 86, FIN-24101 Salo (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): TURUNEN, Matti [FI/FI]; Kirkkoladonkatu 28 B 27, FIN-33560 Tampere (FI). KALLIOKULJU, Juha [FI/FI]; Jokioistentie 5, FIN-37470 Vesilahti (FI). (74) Agent: BERGGREN OY AB; P.O. Box 16, FIN-00101 Helsinki (FI).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  Published With international search report.  (88) Date of publication of the international search report: 9 March 2000 (09.03.00)	

(54) Title: METHOD AND SYSTEM FOR BEARER MANAGEMENT IN A THIRD GENERATION MOBILE TELECOMMUNICATIONS SYSTEM

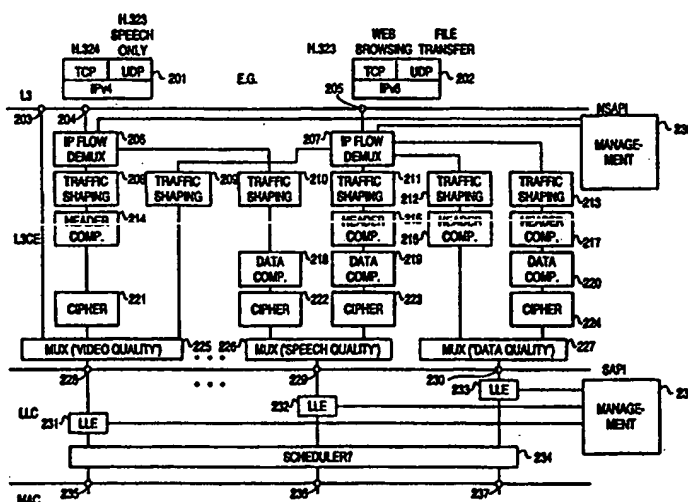

## (57) Abstract

In a telecommunication device the handling of data to be transmitted proceeds according to a protocol stack having a L3 layer and a MAC layer. For handling data flows between the layers the following steps are performed: a flow of data to be transmitted coming from the L3 layer is demultiplexed (206, 207, 403, 404) into a number of component data flows, each having a certain Quality of Service (QoS) requirement; the component data flows are arranged into groups where the QoS requirement of each component data flows in a group is similar to the QoS requirements of the other component data flows belonging to the same group; the component data flows are multiplexed (225, 226, 227, 409) groupwise into multiplexed data flows and outputted to the MAC layer. This way of handling data flows will make it possible for the management entity to increase or to decrease the capacity of each transmission pipe according to need corresponding to different QoS profiles.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 99/00520

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04L 12/56

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04Q, H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 9748251 A1 (TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)), 18 December 1997 (18.12.97), page 9, line 28 - page 10, line 3; page 13, line 25 - page 15, line 34, abstract --	1-3,5
A	WO 9728652 A2 (TIERNAN COMMUNICATIONS, INC.), 7 August 1997 (07.08.97), page 5, line 14 - page 6, line 28 --	1-3,5
A	US 5499238 A (SEUNG W. SHON), 12 March 1996 (12.03.96), abstract --	1-3,5

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

22 December 1999

03 -01- 2000

Name and mailing address of the ISA:

Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM

Authorized officer

Jan Silfverlind/cs

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 99/00520

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9736405 A1 (NOKIA TELECOMMUNICATIONS OY), 2 October 1997 (02.10.97), page 1, line 1 - page 6, line 30  --	1-3,5
P,X	WO 9916266 A1 (TELEFONAKTIEBOLAGET LM ERICSSON), 1 April 1999 (01.04.99), page 21, line 19 - page 22, line 21  --	4
A	EP 0632672 A2 (INTERNATIONAL BUSINESS MACHINES CORPORATION), 4 January 1995 (04.01.95), column 12, line 13 - column 14, line 47  --	4
A	WO 9933301 A1 (NOKIA MOBILE PHONES LTD.), 1 July 1999 (01.07.99), see the whole document  -- -----	4

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/FI99/00520

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2. ☐ Claims Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

**See next page.**

1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
  
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.  
PCT/FI99/00520

I Claims 1-3, 5 directed to a method for multiplexing/demultiplexing of data flows having a certain Quality of Service requirement.

II Claim 4 directed to a method for allocation of data transfer capacity in a telecommunications system.

The "special technical features" of group I relate to a multiplexing/demultiplexing method while the "special technical features" of group II relate to a capacity allocation method. These groups of inventions are not so linked as to form a single general inventive concept. There is no technical relationship among those inventions involving one or more of the same corresponding technical features.



## INTERNATIONAL SEARCH REPORT

Information on patent family members

02/12/99

International application No.

PCT/FI 99/00520

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9748251 A1	18/12/97	AU 3198897 A CA 2257685 A CN 1221547 A EP 0904670 A US 5802051 A	07/01/98 18/12/97 30/06/99 31/03/99 01/09/98
WO 9728652 A2	07/08/97	AU 2245097 A CA 2241936 A EP 0878098 A	22/08/97 07/08/97 18/11/98
US 5499238 A	12/03/96	JP 7193583 A KR 9603783 B	28/07/95 22/03/96
WO 9736405 A1	02/10/97	AU 2162097 A CA 2250040 A CN 1214832 A EP 0886938 A FI 103005 B FI 961363 A	17/10/97 02/10/97 21/04/99 30/12/98 00/00/00 26/09/97
WO 9916266 A1	01/04/99	AU 9287698 A	12/04/99
EP 0632672 A2	04/01/95	JP 2868178 B JP 7058809 A US 5694548 A	10/03/99 03/03/95 02/12/97
WO 9933301 A1	01/07/99	AU 1437899 A FI 974558 A	12/07/99 19/06/99

**THIS PAGE BLANK (USPTO)**